

GATEWAY BLUETOOTH - AUDIO

WITH USB POWER PLUG




APPLICATIONS

» HOTELS
» HOMES



» LEISURE FACILITIES IN GENERAL
» GYMNASIUMS (FOR GROUP CLASSES)

» AND MANY OTHERS...

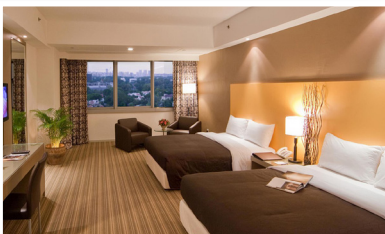

TECHNICAL INFORMATION

PHYSICAL CONNECTIONS	USB Front connector: +5VDC (+/- 5%); Current < 750mA
	Back connector (top/down): L LEFT Audio output (1 Vpp) GND LEFT Ground R RIGHT Audio output (1 Vpp) GND RIGHT Ground GND Ground of the power supply +5VDC +5VDC (+/- 5%) (>750mA)
DIMENSIONS	"Schuko" Type - see diagram below
WEIGHT	50g
OPERATING TEMPERATURE	-10 to +70 (°C)

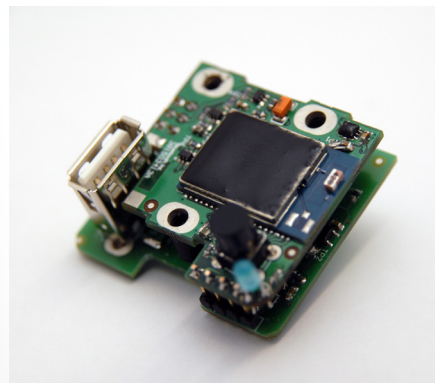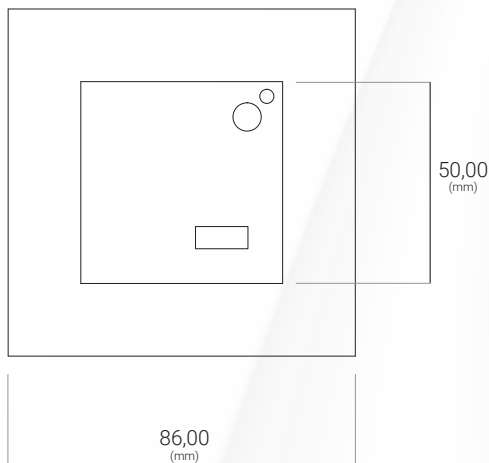

MODELS



MODEL
55040119

Wall mount "Schuko" type;
Other enclosing can be studied.